

[CAIZER W45]

4500kg SWL

Premium series.

Rugged safety lock with automatic air lock release device.

Semi-permanent HDPE Sliding block.

Along platform is suitable for 3D wheel alignment, and enable to handle varies vehicles such as small cars, passenger cars and vans.



Premium Series , Wheel Alignment Hoist



sales@caizer.com.au





(02) 4255 7888

HEAD OFFICE : 16 Orangegrove Ave, Unanderra, NSW 2526



sales@caizer.com.au



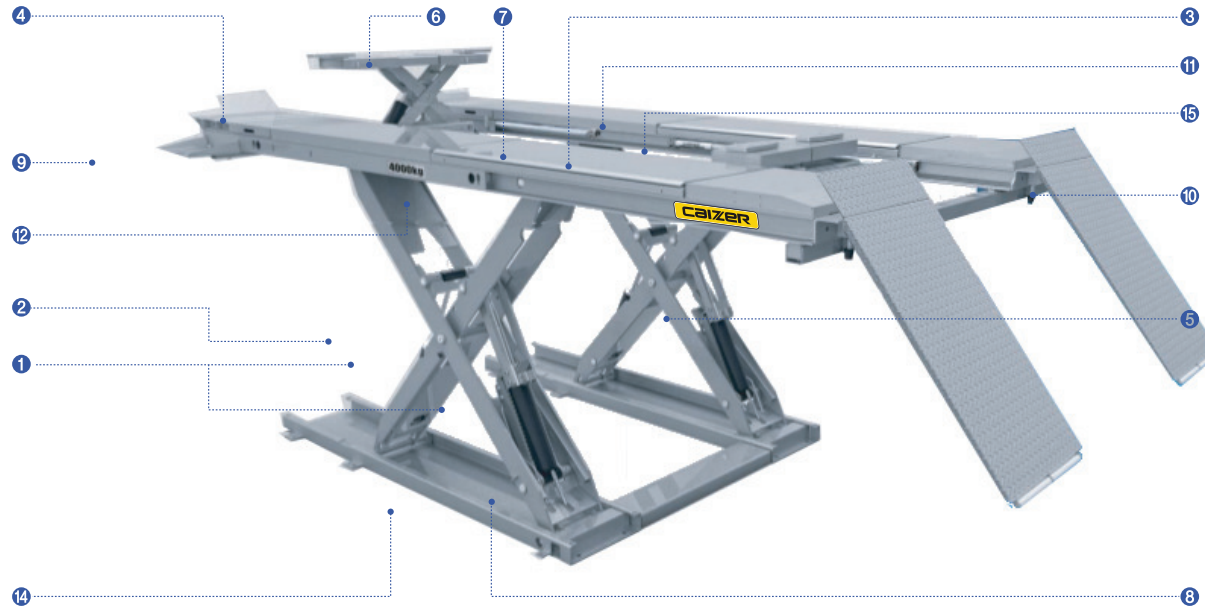

1
Accurate synchronization method
Realized accurate synchronization method through Master-Slave cylinder.



2
Comfortable operation flow
Structure of no obstacle on runway allows workers for more convenient access around the lift.



3
Side Slip
Available to set with variable vehicles by applying adjustable front turntable for wheel alignment operation.



4
Adjustable Front Turntable
Available to set with variable vehicles by applying adjustable front turntable for wheel alignment operation.



5
Robust and durable Locking Sensor
2 strong and reinforced lockers and locking sensors will provides more safety to use the lift.



11
Advantages of 4500mm runway
A long platform is suitable for 3D wheel alignment, and enable to handle varies vehicles such as small cars, passenger cars and vans.



12
Alignment Cable duct
Duct is provided for sensor connection of wheel alignment at the side of runway.




6
Jack Lifts mounted
Two auxiliary jacks are applied for usability.



7
Jack Switch attached
Jack switch which inside of runway applied for reduce damage off lift and safe operation.



8
Orifice applied
Orifice (hydraulic safety circuit) is applied to maintain stable descending speed even if hydraulic hose is damaged.



9
Step aid plate
Removable step aid plate is applied for usability of workers.



10
One body ramp
Ramp is composed as one body type with platform which enables workers to use space efficiently.



13
Exclusive 3D wheel alignment
Stable structure and convenient features for 3D wheel alignment.



14
Two step descending system
The equipment with safety device that lock the lift during descent at 150mm above ground and then descend continually for safety of workers.



15
Lighting Kit
Light enables workers to work safely under the lift.