

CAIZER W50+



CCSS™

Corporate Colour Scheme Skin
Optional cover plate system
colour coded to your choice.



Premium Series , Wheel Alignment Hoist

5000kg SWL

NEW SERIES 2 MODEL

No front or rear crossbars, clear access between platforms

Huge amount of extra steelreinforcement to enable removal of crossvars.

Electronic synchronisation automatically keeps platforms level and in sync

Air operate locking rearslip plates (Auto or Manual)

Control box mounted LCD panel, shows hoist functions and diagnostics

LED lights automatically trun on as hoist raises, turn off at ground level.



Optional: Telescopic pick ups
with 100mm extension




Optional:
3500kg Hydraulic Lift Tables
(Korea only)

New Series 2 Model no front or
rear cross bars
Automatic self levelling system






DRAWING: W50+

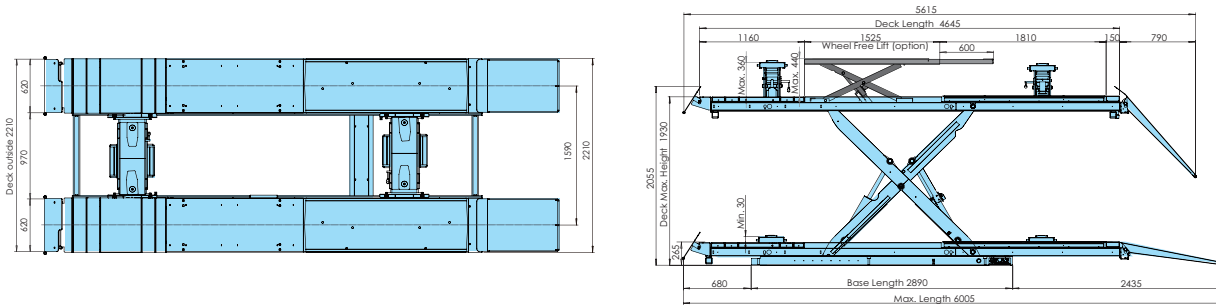

DRAWING: W50+ Inground

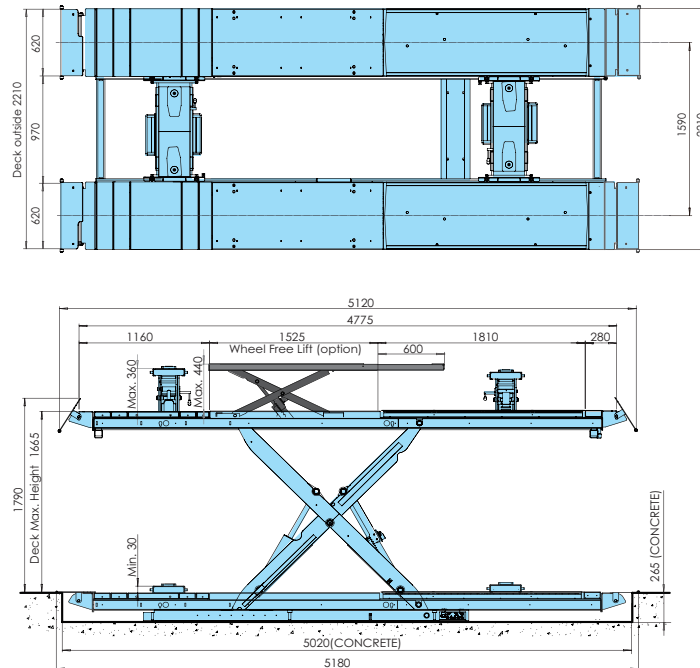

W50+



CAIZERQUIP.COM

Lifting Capacity	Main Lift : 5,000Kg / Jack : 2,500Kg / Wheel Free Jack : 3,500Kg
Max Lifting Height	Main Lift : 1,930mm / Jack : 360mm / Wheel Free Jack : 440Kg
Min. Lifting Height	Main Lift : 265mm / Jack : 30mm
Stroke	Main Lift : 1,665mm / Aux.Lift : 330mm
Asending time	Main Lift : 40 ~ 60 sec. / Aux. Lift : 5 ~ 15 sec. / Wheel Free Jack : 10 ~ 20 sec.
Descending time	Main Lift : 35 ~ 45 sec. / Aux. Lift : 10 ~ 30 sec. / Wheel Free Jack : 10 ~ 30 sec.
Power supply	3PH : 3HP x 4P x 380/415V x 60Hz / 50 Hz
Weight	About 2,300Kg
Dimension	6,005 x 2,210 x 2,055 mm



sales@caizer.com.au



(02) 4255 7888

SCISSOR LIFT

W50+

CAIZERQUIP.COM



W50+

5000Kg SWL



Twin hydraulic Cylinders

Twin hydraulic cylinders provide accurate lifting via a new smart electronic synchronisation system



Height limit sensor

Height limit sensor prevents cylinder stroker out at an adjustable cut off height.



Slip Plates

Easy glide rear slip plates with auto air operated locking device.



Turn table adjustable plates

Drop in adjustable plates allow custom placement of alignment turn tables, and double up as platform continuation when plates are not in use



Ratchet type locks

Dual ratchet type locking system feature electronic lock sensors to provides a superior locking set-up at the touch of a button.



4775mm Ramps

A long platform is suitable for 3D wheel alignment, and enable a variety of vehicles such as vans and long wheel based cars to fit on hoist.



Platform lift tables

In-built lift tables provide wheel free lifting of car on hoist (option in Korea only)



Jacking bridges

2 x 2500Kg electric/hydraulic jacks shown above with optional pads & adaptors.



Jacking bridge switch

Jack switch is mounted on the inner side of the platform providing protection to the switch and adding safer operation to the user.



Hydraulic safety valve

The hydraulic safety valve prevents rapid descent of the hoist regardless of total hydraulic hose failure.



Removable work platform

This optional addition assists the worker by providing greater access to the car.



Adjustable ramps

Height adjustable ramps compensate for uneven workshop surfaces.



3D Alignment compatible

Stable structure / precision leveling making hoist highly compatible for 3D alignment.



Dual stage descending system

A second descent sensor is fitted as a safety feature at 150mm above ground the hoist briefly stops and an alarm sounds upon final descent.



LED lighting kit

4 x Point LED platform lighting illuminates underside of vehicle.



sales@caizer.com.au



(02) 4255 7888